

AU-11CD-4K New Product


De-embed Audio from HDMI (4K Resolution support)



The AU-11CD-4K is an advanced solution for repeating HDMI with integrated Audio de-embedding, up to 5.1. Connect the AU-11CD-K between your source and display via HDMI, and select the audio format required. This device supports 4K resolutions enabling flexible audio signal management from ultra high definition video signal paths.

FEATURES

- Compliant with HDMI, HDCP 1.2 and DVI 1.0
- Supports 4K HDMI Resolutions
- Supports HDMI Sample Rates up to 192 kHz
- Supports Optical S/PDIF sample Rate up to 192 kHz
- Supports TMDS clock frequency rate 300MHz
- Supports built-in audio EDID switching between LPCM 2CH, TV (external) EDID, and Bitstream audio
- HDMI signal amplification and equalisation supporting HDMI cable distance of 10m either side of the device at full 1080p.
- No HDMI output connection is required to receive audio at the analogue and optical outputs
- Supports 3D signals

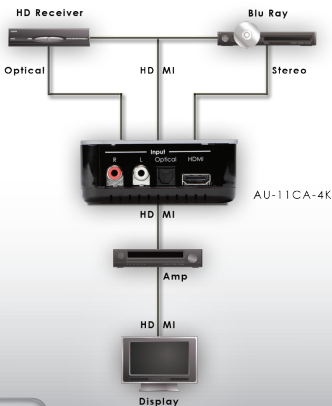

SPECIFICATIONS

Input:	1x HDMI (1x HDMI Uncompressed AV and Data), 1x USB Mini B (1x Service - Propriety Data)
Output:	1x HDMI (1x HDMI Uncompressed AV and Data), 1x Toslink (1x Optical 2 Channel LPCM / Dolby Digital / DTS), 1x 3.5mm Stereo mini-jack (1x Analogue Stereo(L/R))
PSU:	5V/1.2A
Dimensions:	85mm (W) x 85mm (D) x 35mm (H)
Gross Weight:	440g
Net. Weight:	100g
Packaging:	Retail Packaged

