



PU-1106-KIT

v1.3 HDMI over CAT6 Extender
Set with IR Pass-through

OPERATION MANUAL



Table of Contents

1. Introduction	1
2. Applications	1
3. Package Contents	1
4. System Requirements	1
5. Features	2
6. Specifications	3
7. Operation Controls and Functions	4
7.1 Front Panel	4
7.2 Rear Panel	5
8. Pin Assignment	6
8.1 IR Cable Pin Assignment	6
8.2 RJ-45 Pin Definitions	6
10. Connection and Installation	7
11. Acronyms	9

1. Introduction

The HDMI 1.3 transmitter and receiver over CAT6 is the ideal device to send your HDMI signals over long distances. Instead of using expensive HDMI cables, your existing CAT6 cables/sockets can replace HDMI cables while performing the same functions like transferring Deep Color (12 bits/color) video and lossless compressed (Dolby TrueHD, Dolby Digital Plus and DTS-HD Master Audio) digital audio. Moreover, you can use the existing remote to control the source and connect it to another transmitter and receiver to extend your HDMI signal to distances you never thought possible. This HDMI 1.3 Transmitter and receiver is your only choice when looking for an HDMI extender.

2. Applications

- Showroom display/control
- Home entertainment systems
- Commercial displays
- Lecture room display/control

3. Package Contents

- HDMI 1.3 Transmitter x 1
- HDMI 1.3 Receiver x 1
- IR Receiver x 1
- IR Blaster x 1
- 5V DC power supply adaptor x 2
- Operation Manual x 1

4. System Requirements

HDMI input source equipment, output HDMI display, two CAT6 cables and source equipment's remote control.

5. Features

- HDMI 1.3, HDCP 1.1 and DVI 1.0 compliant.
- Supports digital video formats in Deep Color Mode at up to 36 bits (12bits/color) and new lossless compressed (Dolby TrueHD, Dolby Digital Plus and DTS-HD Master Audio) digital audio .
- Supports CAT6 cables for data/DDC transmission
- Equalizes and recovers any incoming TMDS data before re-transmitting it in flawless quality regardless of the incoming signal.
- HDMI cable distance testing showed with 1080p/8bits & 12bits resolution the Input/Output distance can reach up to 15/15 meters away. With CAT6 cable, distance test with 1080p/8bits & 12bits resolution the I/O source can run up to 45/20m away.

Note:


- A. Cable tested with CAT6/23AWG/Solid, using cables of another type may result in a different operating distance.
 - B. Cable distance tested with the following: PS3 40G, 37" Philips 8 bit LCD TV and 37" Samsung 12 bit LCD TV.
 - C. Figures provided in this manual are for reference only, actual performance may depend on the source and display used along with the type of cable.
- Supports CEC bypass and xvYCC
 - Includes an IR Receiver and Blaster
 - Supports wide range of IR frequencies from 30~50KHz
 - Can be connected to another transmitter and receiver to extend an HDMI signal to an extreme distance

6. Specifications

Transmitter	1 x HDMI 1 x IR Blaster 1 x CAT6 Output Video 1 x CAT6 Output DDC
Receiver	1 x HDMI 1 x Receiver 1 x CAT6 Input for Video, 1 x CAT6 Input for DDC
HDMI Input Cable	1080p 8-bit (15M), 12-bit (15M)
HDMI Output Cable	1080p 8-bit (15M), 12-bit (15M)
CAT6 Cable	1080p 8-bit (45M), 12-bit (20M)
Power Supply	5V/1A (US/EU standards, CE/FCC/UL certified) (US/EU standards, CE/FCC/UL certified)
ESD Protection	Human body model: $\pm 8\text{kV}$ (air-gap discharge) $\pm 4\text{kV}$ (contact discharge)
Dimensions (mm)	78.5(W) x 117(D) x 30(H) / Transmitter 78.5(W) x 72(D) x 30(H) / Receiver
Weight(g)	200 / Transmitter 90 / Receiver
Chassis Material	Aluminum
Silkscreen Color	Black
Operating Temperature	0°C ~ 40°C / 32°F ~ 104°F
Storage Temperature	-20°C ~ 60°C / -4°F ~ 140°F
Power Consumption	3.6W/TX, 3.6W/RX
Relative Humidity	20 ~ 90% RH (non-condensing)


7. Operation Controls and Functions

7.1 Front Panel

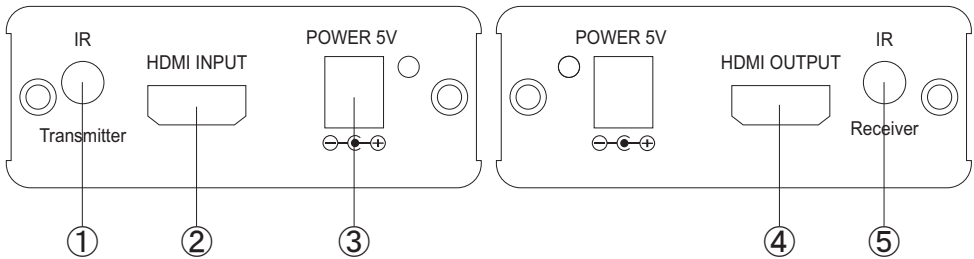


- ① IR Transmitter: This slot is where you connect the IR blaster cable. Place the IR eye in front of the source equipment(s) in order to send an IR signal, the IR blaster has a frequency range from 30KHz to 50KHz.
- ② HDMI INPUT: This slot is where you connect the HDMI or DVI output port of your source equipment such as DVD/Blu-ray players or set-top-boxes with an HDMI cable or receiver unit, you may also connect this device to another unit from the same family or some other type of splitter to further extend an HDMI signal.

Example:

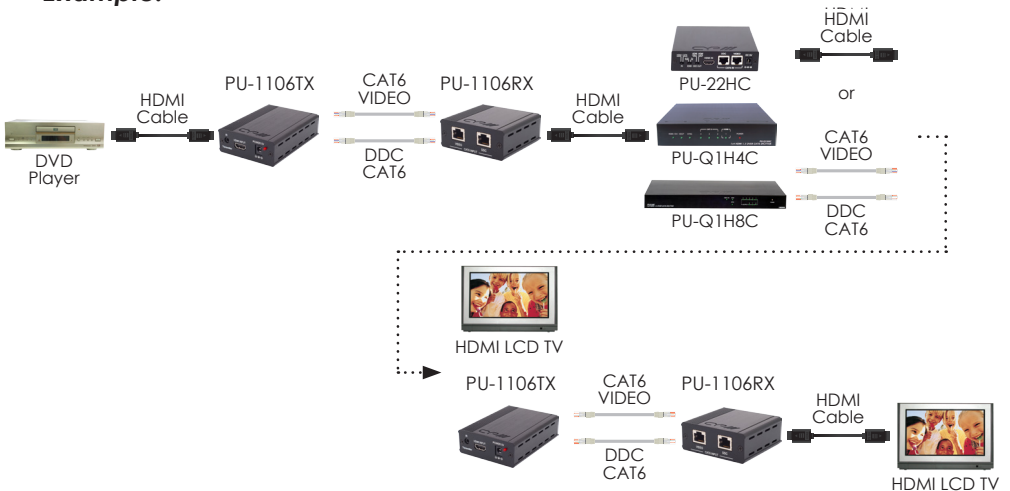


- ③ Power: This slot is where you plug the 5V DC power supply into the unit and connect the adaptor to an AC outlet.
- ④ HDMI OUTPUT: This slot is where you connect the HDMI or DVI input port of your display such as HDTV's or HD monitors or you can connect this device to another unit from the same family or some other type of splitter to further extend an HDMI signal.

Example:

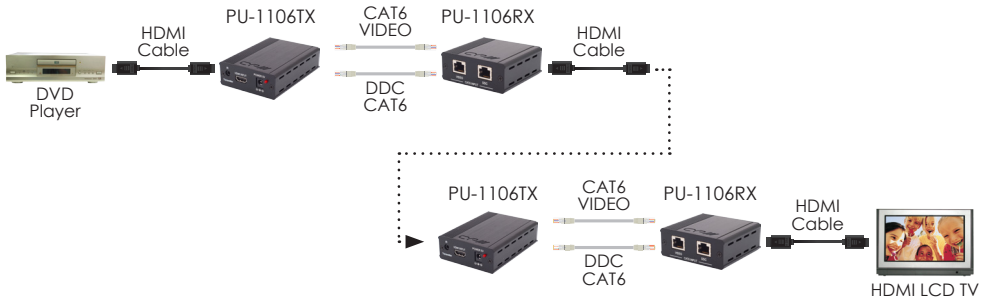

- ⑤ IR Receiver: This slot is where you connect the IR receiver cable, place the IR eye in front of the display then use the existing remote to control the input source equipment. The IR receiver has a frequency range from 30KHz to 50KHz.


7.2 Rear Panel

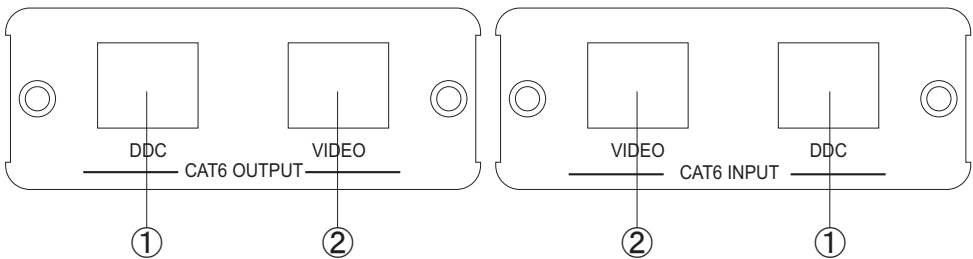

- ① DDC input/output: Connect the DDC output transmitter to the DDC input of the receiver using a CAT6 cable.
- ② Video input/output: Connect the video output of the transmitter to the video input of the receiver using a CAT6 cable.

8. Pin Assignment

8.1 IR Cable Pin Assignment

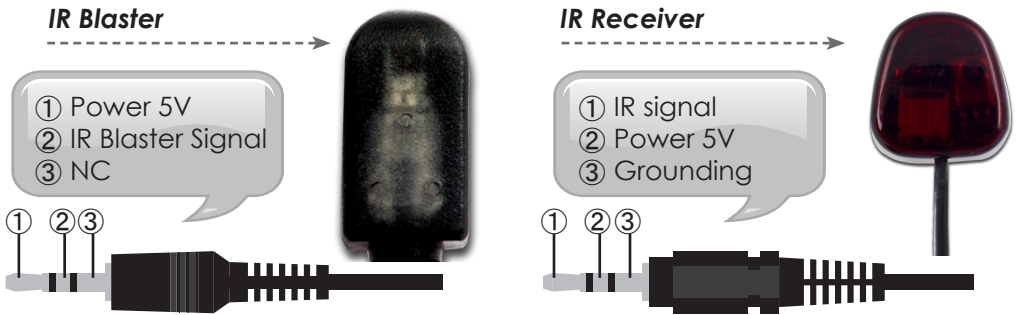


8.2 RJ-45 Pin Definition

Pin	Video	DDC
1	TMDS2+	SCL
2	TMDS2-	N/A
3	TMDS1+	SDA
4	TMDS1-	Power 5V
5	TMDS0+	GND
6	TMDS0-	IR
7	TMDSC+	HPD
8	TMDSC-	CEC


10. Connection and Installation

PU-106 Transmitter
PU-1106 Transmitter

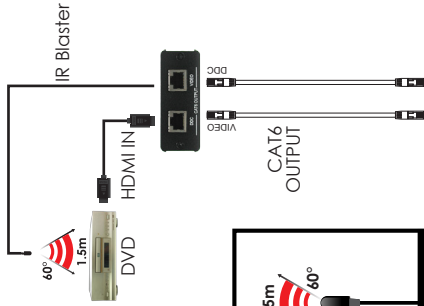

AorBorC

PU-Q1H4C
PU-Q1H8C

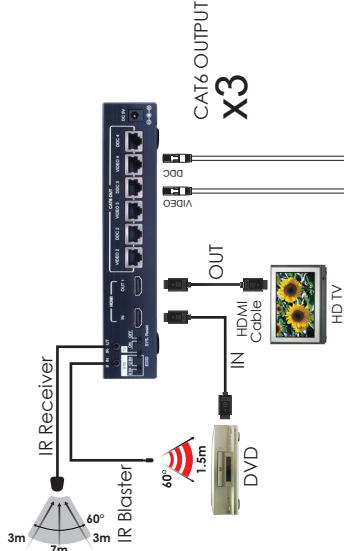


AorBorC


PU-22HC




PU-106 Transmitter
PU-1106 Transmitter
PU-Q1H4C
PU-Q1H8C
PU-O4H4C
PU-22HC

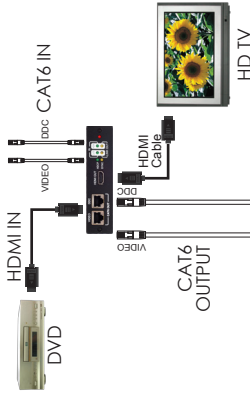






AorBorC



IR BLASTER



IR RECEIVER

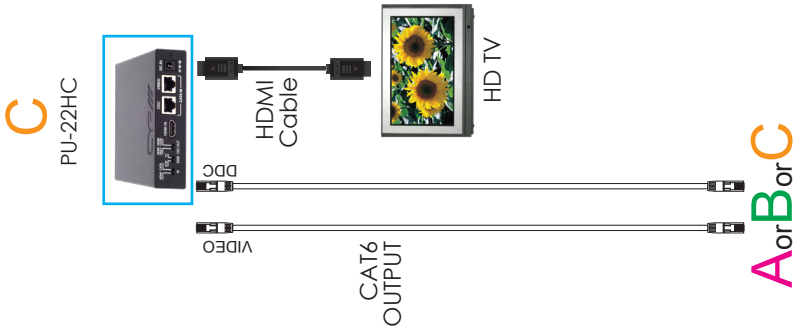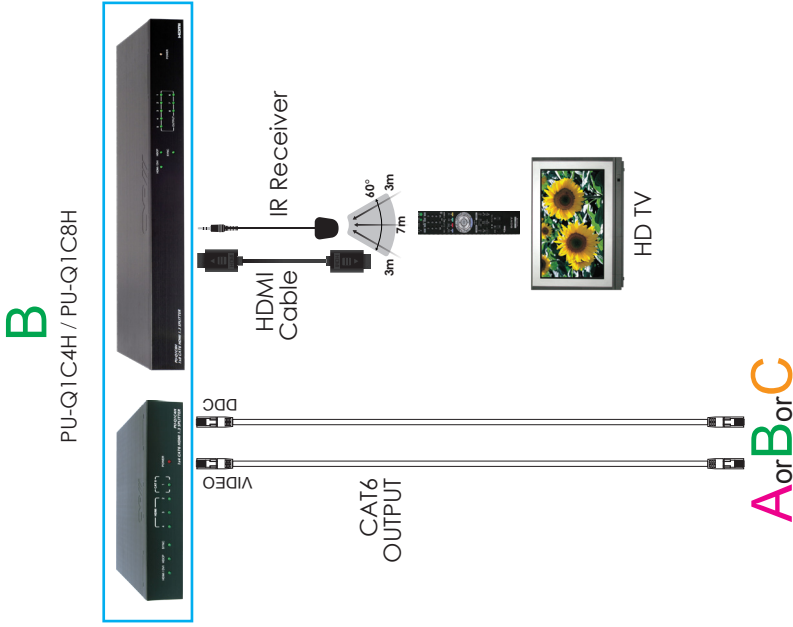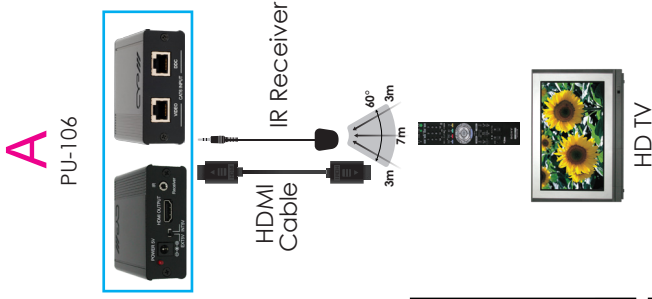



www.cypeurope.com

