

# QU-128/148/188

1 to &/1 to 4/1 to 8
Distribution Amps

# **OPERATION MANUAL**



#### Safety Precautions

Please read all instructions before attempting to unpack or install or operate this equipment, and before connecting the power supply. Please keep the following in mind as you unpack and install this equipment:

- Always follow basic safety precautions to reduce the risk of fire, electrical shock and injury to persons.
- ➤ To prevent fire or shock hazard, do not expose the unit to rain, moisture or install this product near water.
- Never spill liquid of any kind on or into this product.
- Never push an object of any kind into this product through module openings or empty slots, as you may damage parts.
- > Do not attach the power supply cabling to building surfaces.
- > Do not allow anything to rest on the power cabling or allow it to be abused by persons walking on it.
- > To protect the equipment from overheating, do not block the slots and openings in the module housing that provide ventilation.

## Revision History

Version No Date		Summary of Change	
VR0	20110901	Preliminary Release	
VR1	20120307	Combine 1x2 & 1x4	

# **Table of Contents**

1.	Intro	duction	1			
2.	Applications					
3.	Package Contents					
4.	System Requirements					
5.	Features					
6.	Specifications					
7.	Ope	ration Controls and Functions	4			
	7.1	Front Panel	4			
	7.2	Rear Panel	4			
8.	Connection and Installation					
9.	. Acronyms					

#### 1. Introduction

The QU-128/148/188 are high performance, HDCP compliant, DVI distribution amplifiers allowing one DVI input to be distributed to multiple displays simultaneously. Each of the buffered outputs can run up to 15 meters (8-bit) and can be cascaded up to 3 layers.

## 2. Applications

- Simultaneous multi-channel display
- Showroom display
- Educational demonstration
- Installation usage

#### 3. Package Contents

- DVI Splitter
- 5V DC Power Adaptor
- Operation Manual

#### 4. System Requirements

Input source equipment such as PC/NB or Blu-ray player signal with DVI or HDMI to DVI adaptor cable and output to display monitor or TV with DVI connection cable.

#### 5. Features

- HDMI 1.3 and DVI 1.0 compliant
- Supports PC resolutions: VGA to WUXGA
- Supports HDTV resolutions: 480p to 1080p
- Can be cascaded up to 3 layers
- Each output can run up to 15m/8-bit or 10m/12-bit with auto cable compensation
- EDID: The device will read EDID of output 1 and will record it
- All DVI OUT connections output 5V 250mA

## 6. Specifications

Input Port 1 x DVI

Output Ports 2/4/8 x DVI

Audio Sampling Rate Up to 192 kHz

Power Supply 5V DC / 2.6A (US/EU standards, CE/FCC/UL certified)

ESD Protection Human body model: ± 8kV (air-gap discharge)

± 6kV (contact discharge)

Dimensions (mm) 102 (W) x 125 (D) x 30 (H)/2S

102 (W) x 141 (D) x 38 (H)/4S 240 (W) x 103 (D) x 29 (H)/8S

Weight(g) 280/\%8, 550/\% 8, 550/\% 8


Chassis Material Metal Silkscreen Color Black

Operating Temperature  $0^{\circ}\text{C} \sim 40^{\circ}\text{C} / 32^{\circ}\text{F} \sim 104^{\circ}\text{F}$ Storage Temperature  $-20^{\circ}\text{C} \sim 60^{\circ}\text{C} / -4^{\circ}\text{F} \sim 140^{\circ}\text{F}$ Power Consumption 3.5W/2S, 6W/4S, 10W/8S

Relative Humidity 20 ~ 90%RH (non-condensing)


## 7. Operation Controls and Functions

#### 7.1 Front Panel




- ① DVI OUT 7/8/1: These slots are to connect to the displays with DVI cables.
- ② SYNC LED: This LED will illuminate in RED when the source signal is connected and detected by the unit.
- 3 DVI IN: This slot is to connect with input source equipment such as graphic card or PC for input signal sending.
- 4 POWER LED: This LED will illuminate when the power is connected with power supply.
- (5) DC 5V: Plug the 5V DC power supply into the unit and connect the adaptor to AC wall outlet.

#### 7.2 Rear Panel



① DVI OUT 2~6: These slots are to connect to the displays with DVI cables.

#### 8. Connection and Installation

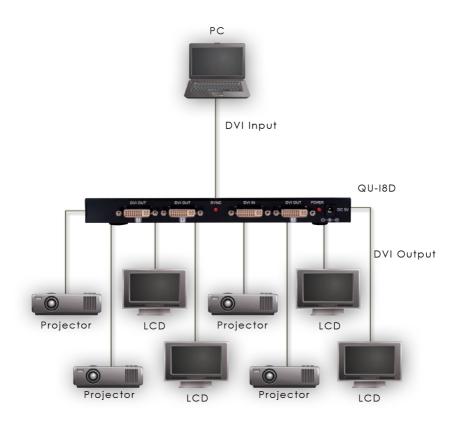



## Acronym Complete Term

DVI Digital Visual Interface

HDCP High-bandwidth Digital Content Protection

HDMI High-Definition Multimedia Interface



www.cypeurope.com