



◆ System Configuration

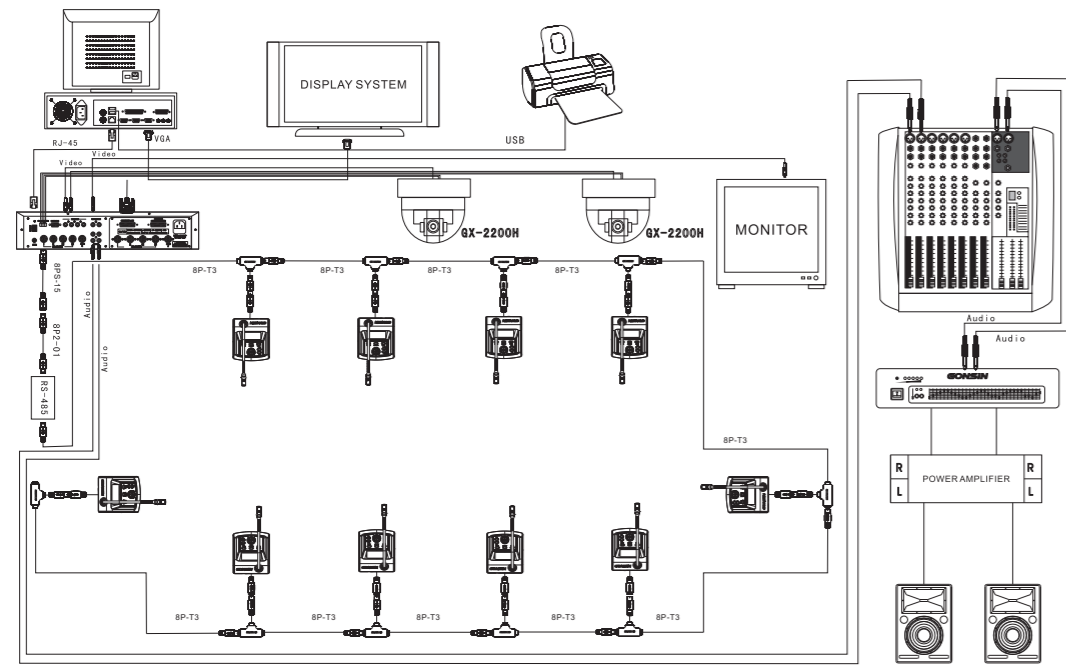

TL-V4200 / TL-VB4200 system connection diagram

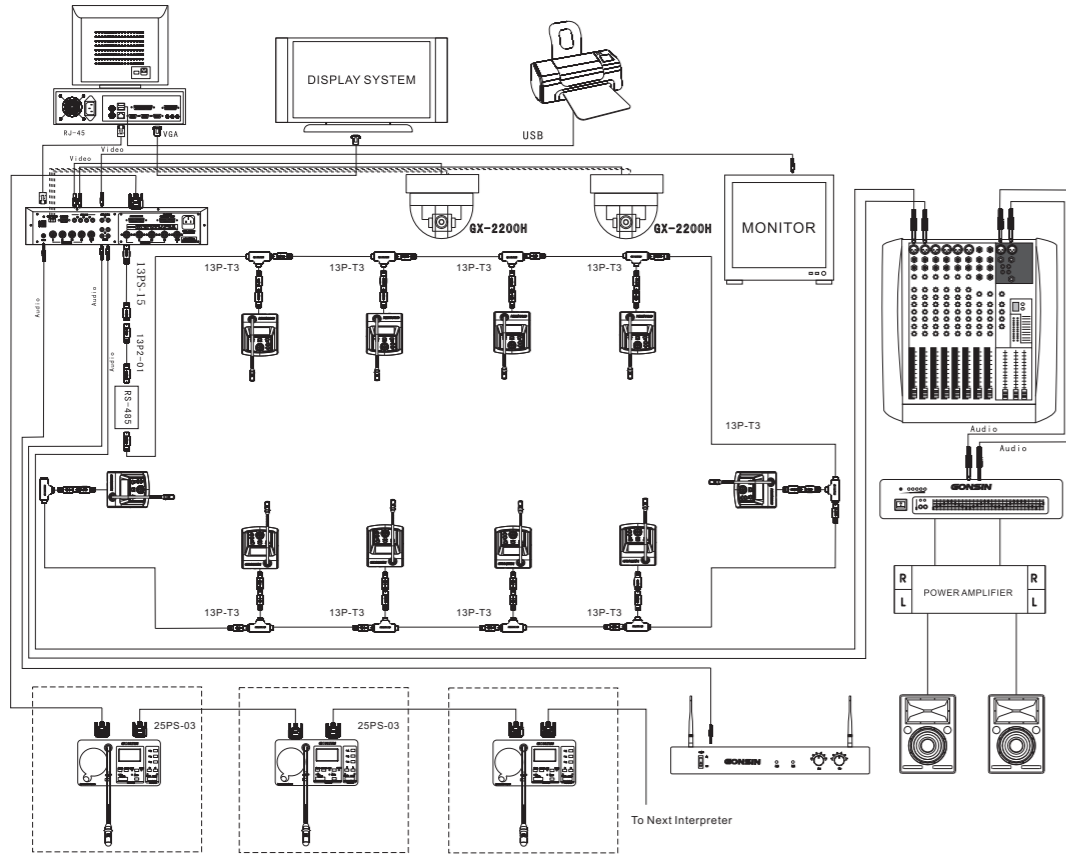

TL-VC4200 / TL-VCB4200 system connection diagram

◆ System Components

Model Number	TL-V4200	TL-VC4200	TL-VB4200	TL-VCB4200
Central Control Unit	TL-Z3	TC-Z3	TL-ZB3	TC-ZB3
Extension Unit	ZJ- KR	ZJ- KR	ZJ- KR	ZJ- KR
Chairman Unit	TL-VX4200	TL-VXC4200	TL-VXB4200	TL-VXCB4200
Delegate Unit	TL-VD4200	TL-VDC4200	TL-VDB4200	TL-VDCB4200
Interpreter Console		TC-F06		TC-F06
Interpreter Headset		TC-D2		TC-D2
Headphone		TC-D3		TC-D3
Management Software	V5.0 (optional)	V5.0 (optional)	V5.0	V5.0
IC Card Encoder			GX-770	GX-770
IC Card			BL7442	BL7442
T-type connection cable	8P-T3	13P-T3	8P-T3	13P-T3
Extension cable	8PS	13PS	8PS	13PS



All rights reserved. The information and specifications included are subject to change without prior notice.

GONSIN CONFERENCE EQUIPMENT CO.,LTD.
www.gonsin.com



GONSIN®



TL-4200

Digital Conference System



GONSIN TL-4200 digital conference system offers versatile conferencing solutions featuring microphone discussion, interactive voting, simultaneous interpretation, language distribution, video tracking, digital recording and software control.

Chairman Unit / Delegate Unit



The conference unit allows the delegate to speak, request to speak and listen to speech, register attendance and cast a vote. Each unit comes with headphone jack and volume control for delegates to listen to the floor speaker and any interpreted language channel, and adjust volume level for comfortable listening. Built-in speaker automatically mutes when microphone is turned on. 1 to 4 delegate microphones can be active at the same time. Multiple chairman and vice-chairman units can be used in one system, and can be active at any time regardless of preset delegate mic limit. Delegate unit can be configured as vice-chairman unit via software. Chairman unit has the additional priority button to override all delegate units to control the conference.



Main Features

- Highly resistant to mobile phone interference
- Channel selectors for interpretation listening
- Pluggable gooseneck microphone stem
- Long microphone pick-up range
- Low profile built-in loudspeaker
- 5 buttons for voting and election
- Built-in chipcard reader
- White-on-blue backlit LCD
- Red ring luminant to indicate active mic



Basic Functions

- Microphone discussion: push to talk or request to talk. AUTO/FIFO/OPERATOR/VOX modes are available for microphone management
- VOX sensitivity and mic time-out are adjustable
- Language interpretation: 1+5 channels. Up/down buttons as channel selectors. Channel number is shown on LCD. Headphone listening with volume control
- Attendance registration: by IC card or MIC key press
- Voting: YES/ABST/NO. Vote counting and result display are enabled automatically by PC
 - Single-choice and multiple-choice voting
 - First keypress and final keypress voting
- Election: elect one or more out of N candidates, with 'competitive election', 'equal number election' and 'quick election'
- Evaluation: 4-key evaluation: Good, Fair, Poor and Abstain
- Dynamic LCD messages for voting, discussion, interpretation and attendance registration
- Supports automatic video tracking, with preset panoramic position



TL-VD4200 TL-VX4200



TL-VDB4200 TL-VXB4200



TL-VDC4200 TL-VXC4200



TL-VDCB4200 TL-VXCB4200

Technical Specifications

Mounting type	fixed or portable tabletop
Language interpretation	1+5 channels
Mic pick-up range	up to 60 cm
Frequency response	50Hz-18kHz
Sensitivity	-46dB±4dB
Power input	24V DC
Microphone stem length	410mm
LCD	47×18mm
Headphone jack	mini 3.5mm
Internal loudspeaker	8Ω/2W
Dimensions	173×145×57 mm (W×D×H)
Weight	0.8 kg
Housing colour scheme	black or silver

Conference Unit Feature Chart

Model Number	Product Description	Gooseneck Microphone	Voting Facilities	Channel Selector	Loud speaker	Phone Jack	LCD Screen	Card Reader
TL-VX4200	Chairman Unit	✓			✓	✓	✓	✓
TL-VD4200	Delegate Unit	✓			✓	✓	✓	✓
TL-VXB4200	Chairman Unit	✓	✓		✓	✓	✓	✓
TL-VDB4200	Delegate Unit	✓	✓		✓	✓	✓	✓
TL-VXC4200	Chairman Unit	✓		✓	✓	✓	✓	✓
TL-VDC4200	Delegate Unit	✓		✓	✓	✓	✓	✓
TL-VXCB4200	Chairman Unit	✓	✓	✓	✓	✓	✓	✓
TL-VDCB4200	Delegate Unit	✓	✓	✓	✓	✓	✓	✓

